

**K 141**  
**K 141/2**  
**K 141 Monitor**

**2144Z0001,02: A**  
**2144Z0005: B**  
**2144Z0024: C**

**K 141 Studio**  
**K 141 Studio II**

**2144Z0012: D**  
**2144Z0013: E**

Description	Item Pos.	Part Nbr. Best.-Nr.	A K141 old/alte Version 01,02	B K141/2 0005	C K141 Monitor 0024	D K141 Studio 0012	E K141 StudioII 0013	Bezeichnung
Outer headband	1	2040M0208	1	1	1	-	-	Bügel
Outer headband	1	2040M0211	-	-	-	1	1	Bügel
Headband	2	2144Z0702	1	-	1	1	1	Bügelband
Headband	2	2144Z0704	-	1	-	-	-	Bügelband
Wedge	3	2144Z0301	2	2	2	2	2	Führungskeil
Screw B 2,2x9,5 for 3+5 with 8	4	7981D2201	4	4	4	4	-	Schraube B 2,2x9,5 für 3+5 an 8
Screw KB22x8 for 3+5 with 8	4	0099N2204	-	-	-	-	4	Schraube KB22x8 für 3+5 an 8
Cover	5	2144Z0401	2	2	2	2	2	Deckel
Rubber loop	6	2040M0303	2	2	2	2	-	Gummischlaufe
Rubber loop	6	2040M0304	-	-	-	-	2	Gummischlaufe
Slider	7	2144Z0501	2	2	2	2	2	Gleitstück
Cover, right	8	2144Z0202	1	-	-	-	-	Schiffchen, rechts
Cover, right	8	2144Z0204+	-	1	-	-	-	Schiffchen, rechts
Cover, right	8	2144Z1502+	-	1	1	-	-	Schiffchen, rechts
Cover, right	8	2144Z1504	-	-	-	1	1	Schiffchen, rechts
Cover, left	9	2144Z0201	1	-	-	-	-	Schiffchen, links
Cover, left	9	2144Z0203+	-	1	-	-	-	Schiffchen, links
Cover, left	9	2144Z1501+	-	1	1	-	-	Schiffchen, links
Cover, left	9	2144Z1503	-	-	-	1	1	Schiffchen, links
Plate 'K141'	10	4517S0003	0	-	-	-	-	Schild 'K141'
Plate 'K141 Monitor'	10	4517S0026	1	-	1	-	-	Schild 'K141 Monitor'
Plate 'Made in Austria'	10	2058Z3002	-	-	-	1	-	Schild 'Made in Austria'
Plate 'Made in Austria'	10	2058Z4201	-	-	-	-	1	Schild 'Made in Austria'
Screw M2x6 for 12	11	0965D2003	2	-	-	-	-	Schraube M2x6 für 12
Screw KB 22x7 for 12	11	0099N2201	-	2	2	-	-	Schraube KB 22x7 für 12
Screw KB 22x8 for 12	11	0099N2213	-	-	-	3	3	Schraube KB 22x8 für 12
Lid	12	2040Z0903	2	2	2	-	-	Deckel
Lid, left	12	2040Z0904	-	-	-	1	-	Deckel, links
Lid, left, with Mini-XLR socket	12	2040M9901	-	-	-	-	1	Deckel, links, mit MiniXLR Buchse
Lid, right	12a	2040Z0905	-	-	-	1	-	Deckel, rechts
Lid, right	12a	2040Z0907	-	-	-	-	1	Deckel, rechts
Screw M4x12 for 1+system	13	0084D4000	2	-	-	-	-	Schraube M4x12 für 1+System
Screw KB 40x14 for 1+system	13	0099N4001	-	-	2	2	2	Schraube KB 40x14 für 1+System
Shell	14	2040Z0801	2	-	-	-	-	Topf
Shell	14	2040Z0802	-	2	2	-	-	Topf
Shell	14	2040Z0803	-	-	-	2	-	Topf
Shell	14	2040Z0804	-	-	-	-	2	Topf
Cover	15	2040Z3301	2	-	-	-	-	Haube
Cover	15	2040Z3302	-	-	2	2	2	Haube
Cover	15	2144Z1301	-	2	-	-	-	Haube
Damper Ring	16	2144Z1001	2	2	2	2	2	Reibung
Swivel joint	17	2040Z0501	2	-	-	-	-	Gelenkstück
Swivel joint	17	2040Z0502	-	2	2	2	2	Gelenkstück
Cardan clamp	18	2040Z0401	2	2	2	2*	2	Kardan-Mittelstück
Nut M4 for 13	19	0562D4000	2	-	-	-	-	Mutter M4 für 13
Capsule DKK32	20	2030Z0010	2	2	2	-	-	Kapsel DKK32
Capsule XXL	20	2606B0002	-	-	-	2*	-	Kapsel XXL
Capsule XXL	20	2606B0003	-	-	-	-	2	Kapsel XXL
or equally useable variation	20	2606B0005	-	-	-	-	2	gleichermaßen verwendbare Version
Foam strip	21	2144Z1201	2	2	2	2	2	Streifen
Disc	23	2144Z0801	2	2	2	2	2	Scheibe
Cushion, bayonet lock	24	2144Z1601	-	-	?	2	2	Polster mit Bajonettverschluss
Cushion with adhesive	24	2144Z0602	2	2	?	-	-	Polster mit Klebeauftrag
Stopper	25	2040Z1901	1	1	1	-	-	Verschluß
Plate 'AKG'	26	4518S0001	0	-	-	-	-	Schild 'AKG'
Plate 'AKG'	26	4518S0011	1	-	1	-	-	Schild 'AKG'
Plate 'AKG'	26	4667S0001	-	2	-	-	-	Schild 'AKG'
Plate 'AKG'	26	2058Z3003	-	-	-	1	-	Schild 'AKG'
Plate 'AKG'	26	2058Z4301	-	-	-	-	1	Schild 'AKG'

+) use this version that corresponds to the second side of the K141 / Jene Variante verwenden, die dem Bauzustand der 2. Seite des K141 entspricht

\*) see Remarks / siehe Hinweise

Description	Pos.	Part Nbr. Best.-Nr.	A K141 old/alte Version 01,02	B K141/2 0005	C K141 Monitor 0024	D K141 Studio 0012	E K141 StudioII 0013	Bezeichnung
Cable per meter	27	1801Z7601	3	-	-	-	-	Kabel per Meter
Cable, complete	27	2502K0003	-	1	1	-	-	Kabel, komplett
Cable, complete	27	0110E0240	-	-	-	1	-	Kabel, komplett
Cable, complete	27	0110E0244	-	-	-	-	1	Kabel, komplett
Cable sleeve	**)	2040Z1001	1	-	-	-	-	Kabeltülle
Adapter plug 1/8"...1/4"	29	0018E0335	-	1	1	1	1	Steckeradapter 3,5...6,3mm
Jack plug 1/4"	--	0016E0217	1	-	-	-	-	Klinkenstecker 6,3 mm
Capsule housing	30	2144Z0102	2	2	2	-	-	Kapselgehäuse
Capsule housing	30	2144Z0103	-	-	-	2*	-	Kapselgehäuse
Capsule housing	30	2144M9901	-	-	-	-	2	Kapselgehäuse
Contact spring	31	2058Z3101	-	-	-	1	-	Kontaktfeder
Printed circuit board, complete	32	2058M3201	-	-	-	1	-	Print, komplett
Rubber disc	33	2058Z3401	-	-	-	2	-	Gummischeibe
Stranded wire, white, per meter	34	1800Z6402	x	x	x	x	x	Litze, weiß, per Meter
Stranded wire, red, per meter	35	1800Z6403	x	x	x	x	x	Litze, rot, per Meter
Stranded wire, red, per meter	36	1801Z6503	-	-	-	-	x	Litze, rot, per Meter
Stranded wire, white, per meter	37	1801Z6502	-	-	-	-	x	Litze, weiß, per Meter
Stranded wire, yellow, per meter	38	1801Z6507	-	-	-	-	x	Litze, gelb, per Meter
Rubber ring	39	6000N0023	-	-	-	-	2	O-Ring

\*) see Remarks / siehe Hinweise

\*\*)On cable where it enters the earpiece / Am Kabel an der Eintrittsstelle in das Hörsystem

### Remarks

In the model "K 141 Studio" parts 30, 20 and 18 are glued together. They cannot be separated and are available as a complete subassembly. This and all other parts that are exclusively used for the K 141 Studio will be sold as long as our stock lasts. For later repairs we will exchange the headphones against K 141 Studio II at special rates but only in case that parts are not available.

Parts with a "0" in the quantity line are no longer available. Those with "?" have to be used by choice according to the actual version of the item to be repaired.

The capsule housing 30 is delivered with the damping cover already attached. We no longer stock the capsule housings for the old version K 141. The new version can be equally used but has bayonet locks for the ear cushions. Lid 12 contains the Min-XLR socket 36.

### Hinweise


Im "K 141 Studio" sind die Teile 30, 20 und 18 verklebt. Sie können nicht getrennt werden und sind als komplette Baugruppe erhältlich. Diese, sowie alle anderen Teile die nur im K 141 Studio Verwendung finden, sind verfügbar solange der Vorrat reicht. Für spätere Reparaturen tauschen wir den Hörer zu Sonderkonditionen gegen einen K 141 Studio II aus, aber ausschließlich in Fällen wo Teile nicht mehr verfügbar sind.

Teile mit "0" in der Mengenspalte sind nicht mehr verfügbar. Teile mit "?" in der Mengenspalte sind je nach Bauzustand des zu reparierenden Geräts wahlweise zu verwenden.

Das Kapselgehäuse 30 wird mit aufgeklebter Reibung ausgeliefert. Statt der alten Version können wir nur mehr die Ausführung mit Bajonettverschluss für die Ohrpolster liefern. Deckel 12 enthält den Mini-XLR-Einsatz.


Wiring diagram K 141 Monitor / K 141/2

Schaltbild K 141 Monitor / K141/2

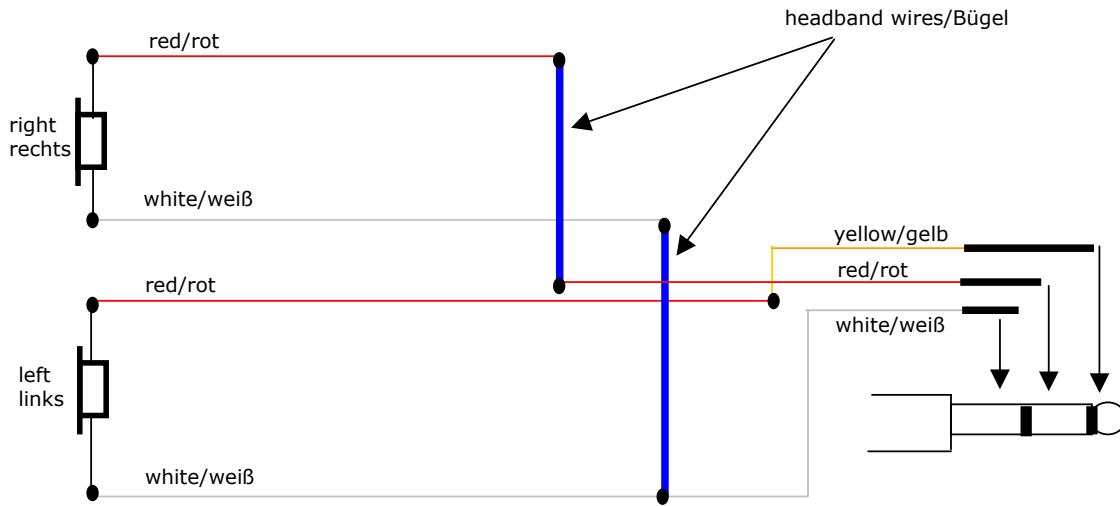

Wiring diagram K 141 Studio / K 141 Studio II

Schaltbild K 141 Studio / K141 Studio II

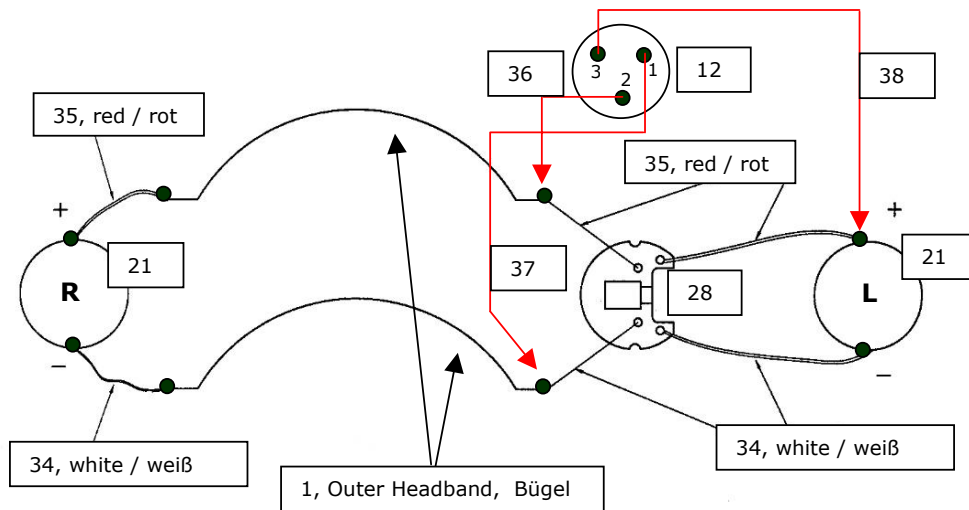

Wiring diagram old K 141 Versions

Schaltbild K 141 alte Versionen

