



MODEL NO.: **CK2800** **4K** 3840×2160

28" CARRY-ON 4K BROADCAST DIRECTOR MONITOR

Specific Monitor by NEWAY with Broadcast Quality for Full HD Camcorder Application for CCTV Monitoring & Making Movies





4K 4K Ultra-HD resolution
Ultra HD 4K screens contain 8.3 million pixels (3840×2160), so the resolution is four times that of Full HD, and making the innovative 4K screen the ultimate in cinematic displays.

28" Big unit, large view
It features 28" 16:9 LED display, 170° wide viewing angles, enjoy Consistent Images from Any Perspective. Strongly recommend for directors!

Lightbulb icon Precise color
1000:1 high contrast, 300cd/m² brightness, so you can enjoy sharper, more detailed images and richer colors than ever before.

- Carry-on suitcase**
The suitcase improves the monitor robustness & portability, also speeds up heat radiating. It makes monitor more stability and reliability. Specially suitable for live shooting and post production.
- Metal housing**
A good protection from damage with all aluminum mainbody, to extend the life time of your monitor.
- Rich interfaces**
The monitor comes with 3G-SDI, HDMI, VGA, DVI & Audio interfaces. Multiple inputs meet the best need of various professional display solutions.

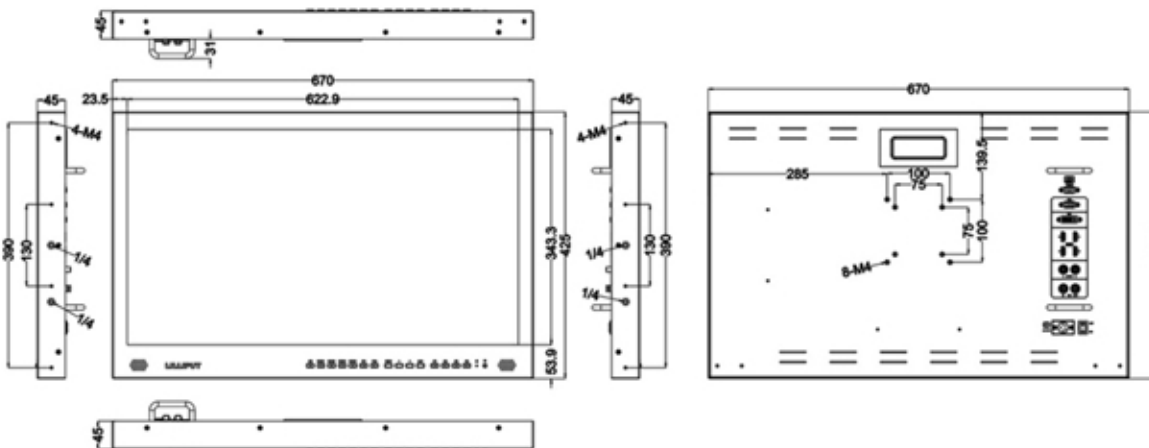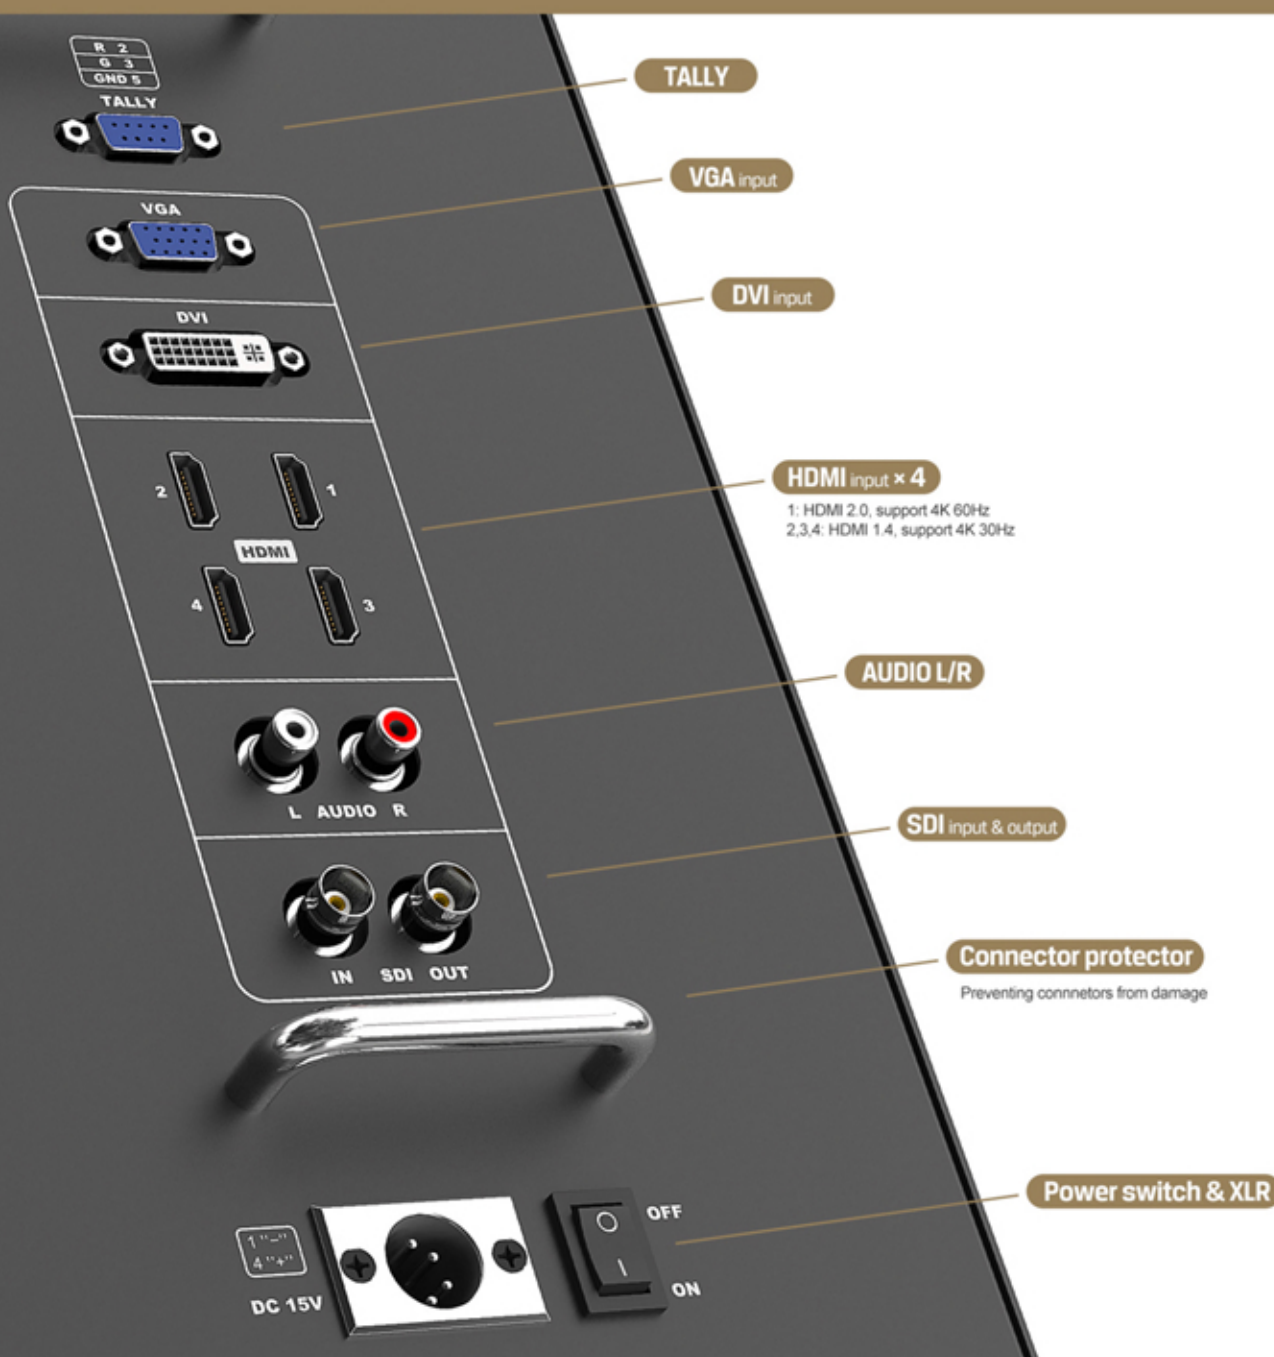

SPECIFICATIONS / ACCESSORIES

DISPLAY	Panel	28"	SMPTE-125M	480i(59.94)	STANDARD	1. Folding sun shade cover	1 piece
	Physical Resolution	3840×2160		1080i(60/59.94/50)		2. 15V DC adapter	1 piece
	Aspect Ratio	16:9		1080p(30/29.97/25/24/24sF/23.98/23.98sF)		3. Carry-on suitcase	1 piece
	Brightness	300cd/m ²		SMPTE-292M 1080p(30/29.97/25/24/24sF/23.98/23.98sF)		4. Battery plate bracket	1 piece
INPUT	Contrast	1000:1	SMPTE-296M 720p(60/59.94/50/30/29/25/24/23.98)	OPTIONAL	5. Manual	1 copy	
	Viewing Angle	170° / 160° (H/V)	SDI Format		720p(60/59.94/50)	1. V-mount	1 piece
	3G-SDI	1	SMPTE-372M 1080i(29.97/25/24/23.98)		2. Anton Bauer mount		1 piece
	HDMI	HDMI 2.0×1 (support 4K 60Hz) HDMI 1.4×3 (support 4K 30Hz)	1080p(60/59.94/50/30/29.97/25/24/23.98)				
OUTPUT AUDIO	DVI	1	SMPTE-425M-AB 1080p(60/59.94/50)				
	VGA	1	-Level A & Level B 720p(60/59.94/50/30/29.97/25/24/23.98)				
	Audio	2 (L/R)	-Level B 2x 1080i(60/59.94/50)				
	Tally	1	ITU-R BT.656 576i(50)				
POWER	Connector protector	Preventing connectors from damage	HDMI Format	4K, 1080p, 1080i, 1035i, 720p, 576p, 576i, 480p, 486i			
	Power switch & XLR						
	Current	2.8A (15V)					
	Input Voltage	DC 12-24V (XLR)					
ENVIRONMENT	Battery Plate	V-mount/ Anton Bauer mount					
	Power Consumption	≤37.5W					
	Operating Temperature	-20℃~50℃					
	Storage Temperature	-30℃~60℃					
DIMENSION	Dimension (LWD)	670×425×45mm / 761×474×173mm(with case)					
	Weight	9.4kg / 21kg(with case)					

Note: Due to constant effort to improve products and product features, specifications may change without notice.